


Presentation at Hainan University

An Experiment Tutorial for the NorNet Core Testbed at Hainan University

Thomas Dreibholz, dreibh@simula.no

Simula Research Laboratory

27 October 2014

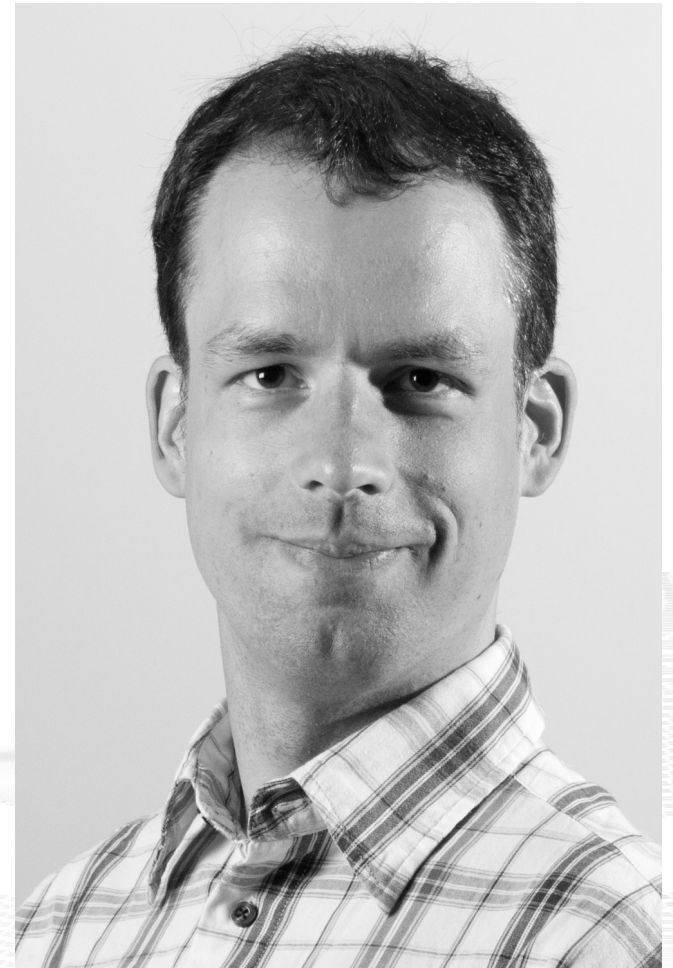

Contents

- Preparations
- Getting an Overview of the Testbed
- Using a Slice
- A Practical Example
- Conclusion

Overview: Preparations

- Preparations
- Getting an Overview of the Testbed
- Using a Slice
- A Practical Example
- Conclusion

Tutorial Accounts

- You should have received an account
 - Username
 - Password
- Valid for:
 - SSH login server
 - PLC server

Do you have an account? If not, ask!

Initial Tasks

- **Account for our SSH login server** gatekeeper.nntb.no:
 - Server is gateway into NorNet Core network
 - `ssh <username>@gatekeeper.nntb.no`
 - Use port forwarding to access PLC and Monitor servers:
 - `ssh <username>@gatekeeper.nntb.no \`
 `-L 2000:plc.simula.nornet:443 \`
 `-L 2001:monitor.simula.nornet:80`
 - Forwards TCP port 2000 to PLC server's HTTPS port
 - Forwards TCP port 2001 to Monitor server's HTTP port
- **Account for the PLC server** plc.simula.nornet (inside NorNet Core only):
 - Login: `<username>@simula.nornet`
- **VPN into NorNet Core coming soon**

Try to directly connect to your NorNet Core switch

Access to PLC and Monitor

- Via port forwarding:
 - Monitor: <http://localhost:2001/>
 - PLC: <https://localhost:2000/>
- Inside NorNet Core network:
 - Monitor: <http://monitor.simula.nor-net>
 - PLC: <https://plc.simula.nor-net>

Is everybody able to log in?


Overview:

Getting an Overview of the Testbed

- Preparations
- Getting an Overview of the Testbed
- Using a Slice
- A Practical Example
- Conclusion

“Kontrollsenteret”

Velkommen til NorNet-Kontrollsenter på Simula Research Laboratory, Fornebu

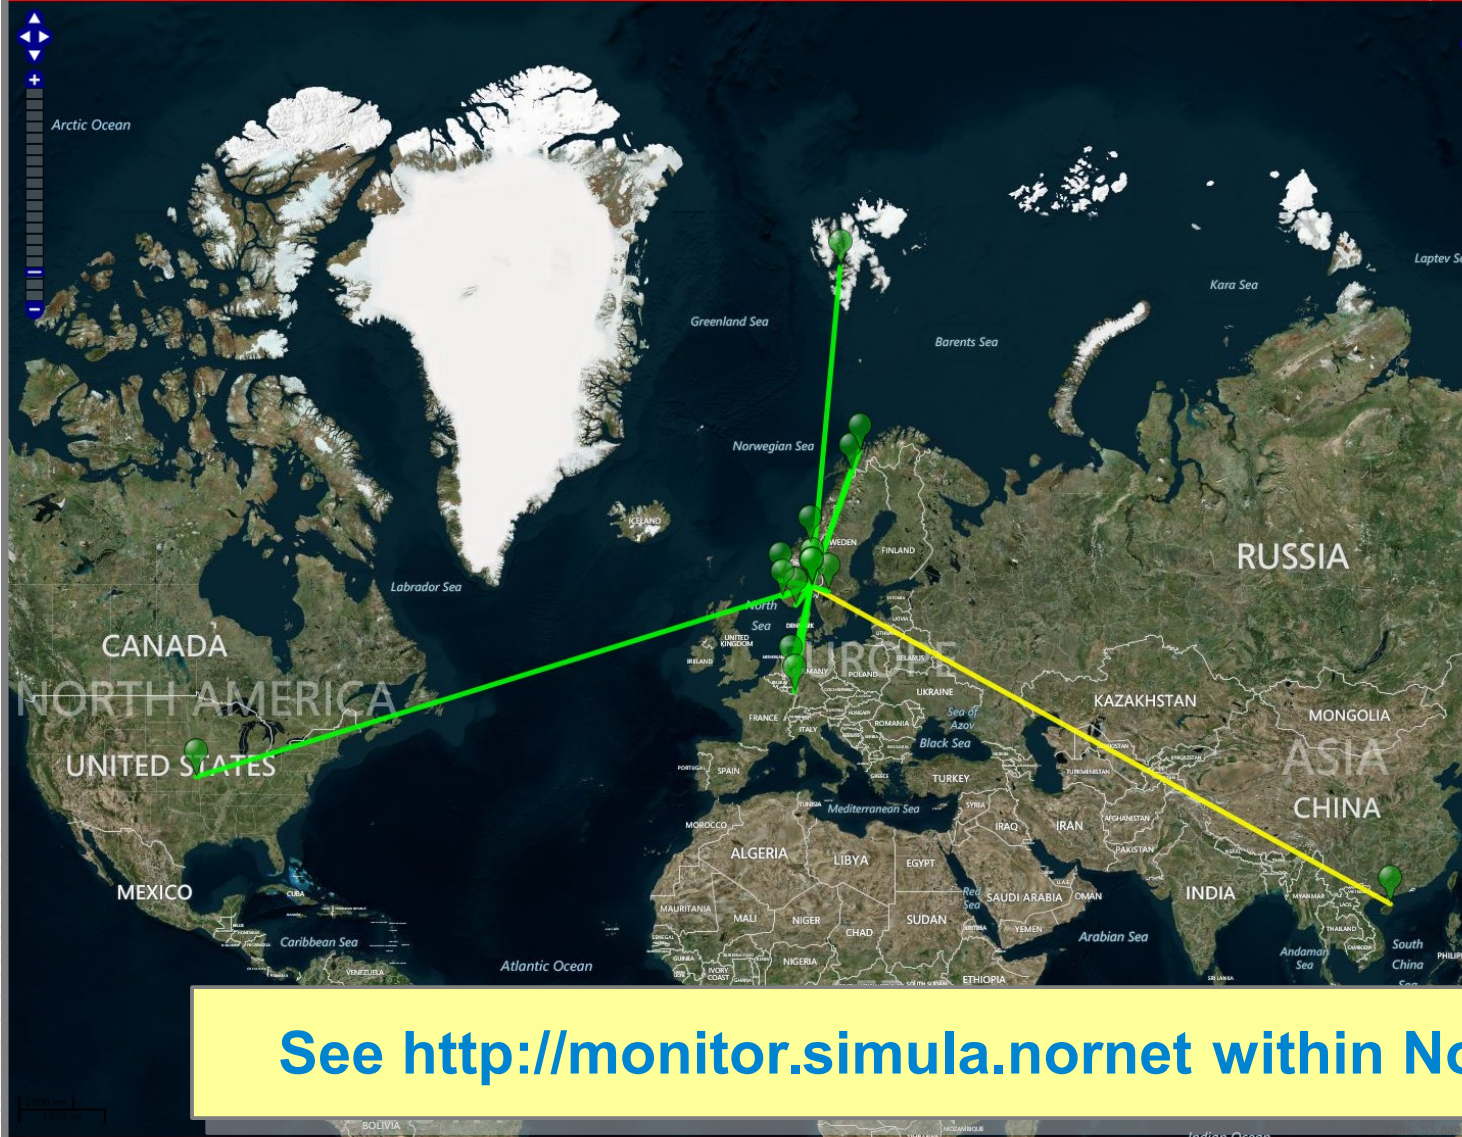

15:10:22

Mandag, 28. juli 2014

Lofasjon

Problemer:

😊 Ingen problem! 😊

I orden:

- @Hainan University
- @Høgskolen i Gjøvik
- @Høgskolen i Narvik
- @Høgskolen i Oslo og Akershus
- @Karlstads Universitet
- @Simula Research Laboratory
- @Universitetet i Agder
- @Universitetet i Bergen
- @Universitetet i Oslo
- @Universitetet i Stavanger
- @Universitetet i Tromsø
- @Universitetet i Trondheim

See <http://monitor.simula.nor-net> within NorNet Core!

For mer informasjon om NorNet-prosjektet, se <https://www.nnfd.no>!

PLC User Interface: Sites View

Sites - all peers | NorNet Testbed - Mozilla Firefox

https://plc.simula.nor-net/db/sites/index.php

NorNet Testbed edit primary links

thomas.dreibholz@googlemail.co... Home

Sites - all peers

[All sites](#) [Local sites](#) [My site](#) [Joining Sites](#)

Search and ☒

25 items/page

1	PEER	FULL NAME	LOGIN	ABBREV.	N	U	S	?
71	NorNet	Hoegskolen i Gjøevik	hig	HiG	6	2	0	
78	NorNet	Hoegskolen i Narvik	hin	HIN	6	2	0	
1	NorNet	NorNet Testbed Central	nn	NorNet Testbed	0	3	5	No node Not public
77	NorNet	Universitetet i Trondheim	ntnu	NTNU	6	2	1	
69	NorNet	Simula Research Laboratory	srl	SRL	12	52	3	
79	NorNet	Universitaet Duisburg-Essen	ude	UDE	4	2	1	
75	NorNet	Universitetet i Agder	uia	UIA	6	2	0	
74	NorNet	Universitetet i Bergen	uib	UIB	6	2	0	
70	NorNet	Universitetet i Oslo	ulo	UIO	6	2	0	
73	NorNet	Universitetet i Stavanger	uis	UIS	6	2	0	
72	NorNet	Universitetet i Tromsø	uit	UIT	6	2	0	
76	NorNet	Universitetet paa Svalbard	unis	UNIS	6	2	0	

Notes
N = number of nodes
U = number of users
S = number of slices
I = site_id
? = status
Hold down the shift key to select multiple columns to sort
Enter & or | in the search area to switch between AND and OR search modes

drupal

- create content
- my account
- administer
- log out

See <https://plc.simula.nor-net> within NorNet Core!

PLC User Interface: Nodes View

NorNet Testbed [edit primary links](#)

thomas.dreibholz@googlemail.co... [Home](#)

[Logout of NorNet Testbed](#)

[My Account](#)

- [My Site Accounts](#)
- [Local Accounts \(slow\)](#)
- [All Accounts \(slow\)](#)

[Sites](#)

- [My Site](#)
- [Pending Requests](#)

[Nodes](#)

- [My Site Nodes](#)
- [Register Node](#)

[Slices](#)

- [My Site Slices](#)
- [Create Slice](#)
- [Sirius](#)

[Admin search](#)

- [Add Node](#)
- [Tags](#)
- [Node groups](#)
- [Peers](#)
- [Events](#)

[About MyPLC](#)

- [PLCAPI doc](#)
- [NMAPI doc](#)

drupal

- [create content](#)
- [my account](#)
- [administer](#)
- [log out](#)

NorNet Testbed [Nodes - all peers](#)

[All nodes](#) [My site nodes](#) [Local nodes](#)

[Node table layout](#) ?
can't open file

Add/remove columns **Column description and configuration**

Column	Description	Configuration
A	Architecture name	☐
DA	Date added	☐
DL	Deployment	☐
DN	Toplevel domain name	☐
IP	IP address	☒
OS	Operating system	☐
SN	Site name	☒


Authority

Node state: should be "boot"


Search

ID	HOSTNAME	AU	ST	RES	IP	SN	?
456	adventfjorden.unis.nor-net	NorNet	boot		10.30.42.104	unis	
404	akerbrygge.simula.nor-net	NorNet	boot		10.1.1.100	srl	
414	akerselva.simula.nor-net	NorNet	boot		10.1.1.110	srl	
470	altenessen.ude.nor-net	NorNet	boot		10.30.42.100	ude	
428	amundsen.uit.nor-net	NorNet	boot		10.1.4.100	uit	
432	arctandria.uit.nor-net	NorNet	boot		10.1.4.104	uit	
436	askje.uis.nor-net	NorNet	boot		10.1.5.102	uis	
430	aunegaarden.uit.nor-net	NorNet	boot		10.1.4.102	uit	
459	bakklandet.ntnu.nor-net	NorNet	boot		10.1.9.101	ntnu	
471	baldeneysee.ude.nor-net	NorNet	boot		10.30.42.101	ude	

PLC User Interface: Account View

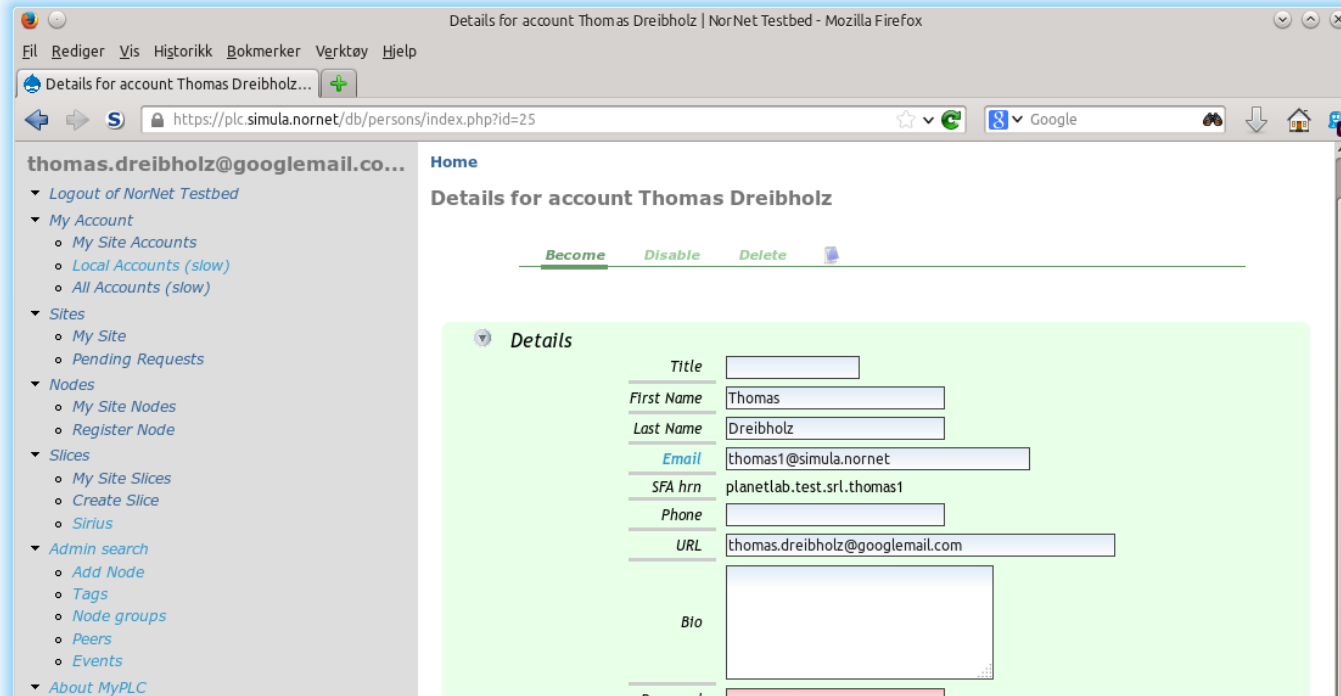

- **Upload your SSH public key here!**
- **Public keys get distributed to all nodes (may take up to 1 hour!)**

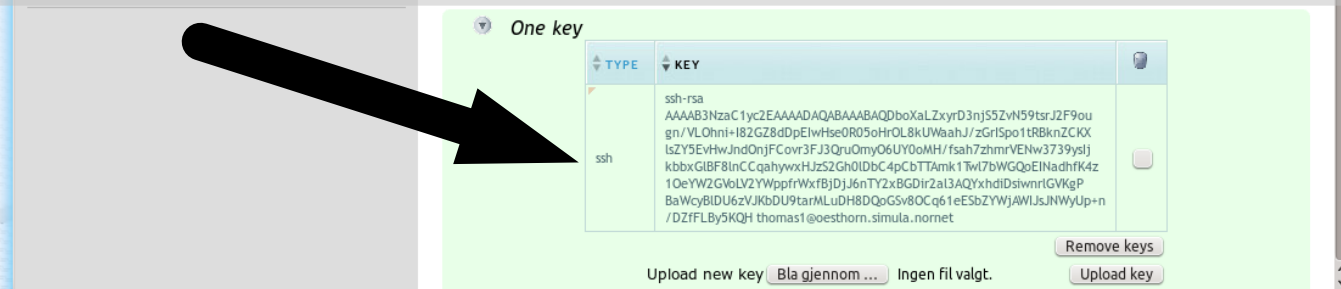

Overview: Using a Slice

- Preparations
- Getting an Overview of the Testbed
- Using a Slice
- A Practical Example
- Conclusion

The Test Slice *srl_test*


- A test slice has already been created:
 - Name: *srl_test*
 - Special NorNet Core properties:
 - Own IP addresses on each node
 - IPv4 and IPv6
 - Multiple ISPs (at sites with several ISPs)
- The slice is instantiated on all nodes by a sliver (LXC container)
- Your account is mapped as user to *srl_test*

Logging In

- From the login server:
 - `ssh -i <your private key> <slice name>@<node name>`
- Examples (private key is in `~/.ssh/id_rsa`, slice is `srl_test`):
 - `ssh -i ~/.ssh/id_rsa srl_test@nordberg.simula.nornet`
 - `ssh -i ~/.ssh/id_rsa srl_test@boao.hu.nornet`
 - `ssh -i ~/.ssh/id_rsa srl_test@altenessen.ude.nornet`
 - `ssh -i ~/.ssh/id_rsa srl_test@bjoernfjell.hin.nornet`
 - `ssh -i ~/.ssh/id_rsa srl_test@snoeflak.unis.nornet`
- Note: login is via node's SSH server to sliver on the node!

Use PLC to find other nodes. There are 96 nodes!

Note the Different Entities: Server, Node, Sliver

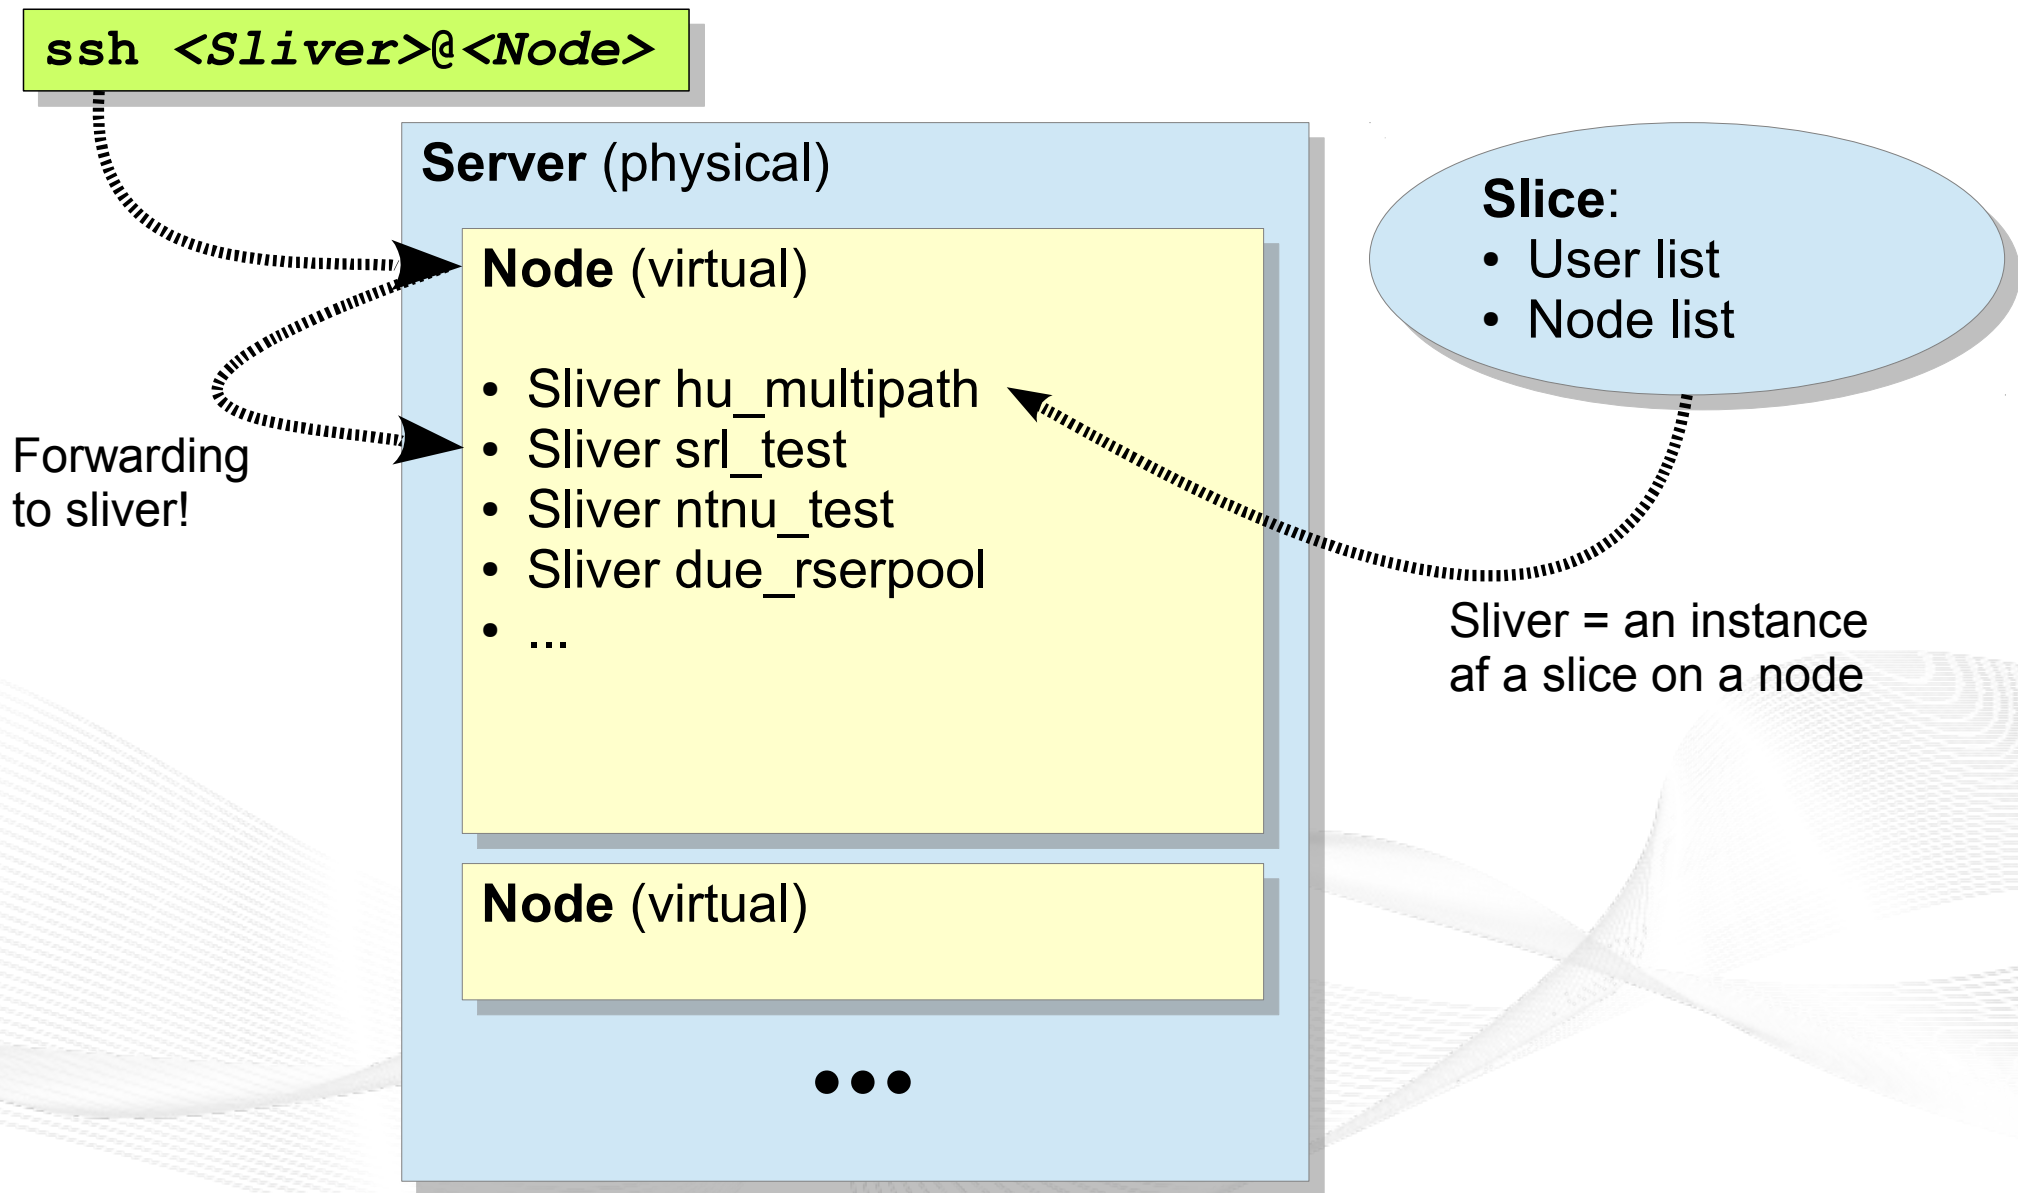

Inside a Sliver

- Each sliver contains a Fedora Core 18 environment
- **Obtain root access:**
 - `su`
 - `sudo bash`
- **Install custom software:**
 - `yum install <package> ...`
 - Example: `yum install netperf`
- **Show IP addresses and routes:**
 - `ip -4 addr show ; ip -4 route show`
 - `ip -6 addr show ; ip -6 route show`

Remember: slivers have their own addresses!

Nodes, Slivers and Addresses

- Node:
 - The node itself, e.g. `altenessen.ude.nor-net`
 - Used for SSH login
- How to find sliver addresses of a node?
 - Look inside the sliver itself (login to sliver → `ip addr show`)
 - Ask the DNS server:
 - Use “dig” (part of `bind-utils` package for Fedora Core)
 - `dig <slice name>.<node name>.<site name>.nor-net`
 - But replace “_” by “-” in slice name!
 - Examples for `srl_test` slice:
 - `dig srl-test.altenessen.ude.nor-net any` to obtain primary provider (it is in the CNAME, here: “dfn”)
 - `dig srl-test.altenessen.all.ude.nor-net any` to obtain all providers' addresses
 - `dig srl-test.solvang.all.simula.nor-net` without “any” → gets only A RRs (i.e. IPv4 addresses)

A dig Example

```
ola1@nordberg:~$ dig srl-test.solvang.all.simula.nor-net any
; <<>> DiG 9.9.2-P1 <<>> srl-test.solvang.all.simula.nor-net any
...
;; ANSWER SECTION:
srl-test.solvang.all.simula.nor-net. 86400 IN A 10.2.1.130
srl-test.solvang.all.simula.nor-net. 86400 IN A 10.1.1.130
srl-test.solvang.all.simula.nor-net. 86400 IN AAAA 2001:700:4100:101::82:69
srl-test.solvang.all.simula.nor-net. 86400 IN AAAA 2001:700:4100:201::82:69
srl-test.solvang.all.simula.nor-net. 86400 IN HINFO "Amiga 5000" "Slice srl_test"
srl-test.solvang.all.simula.nor-net. 86400 IN LOC 59 53 45.240 N 10 37 39.360 E 15.00m
;; AUTHORITY SECTION:
simula.nor-net. 86400 IN NS ns.ntnu.nor-net.
...
```

IPv4

IPv6

Geographic location

Software

Overview: A Practical Example

- Preparations
- Getting an Overview of the Testbed
- Using a Slice
- A Practical Example
- Conclusion

A Multi-Path Routing Test

- Select two nodes at different sites
 - List: <https://www.nntb.no/pub/nor-net-configuration/NorNetCore-Sites.html>
 - Login to *srl_test* sliver: `ssh srl_test@<node name>`
 - Check IP addresses: `ip -4 addr show dev eth0`
 - Example:
 - `srl-test.kettwig.ude.nor-net:` 10.30.42.122 10.31.42.122
 - ISPs: 30=DFN, 31=Versatel (an ADSL connection)
 - `srl-test.frogner.simula.nor-net:` 10.1.1.131 10.2.1.131 10.4.1.131 10.9.1.131
 - ISPs: 1=UNINETT, 2=Hafslund, 4=Telenor, 9=PowerTech
- Try ping/traceroute:
 - `ping [-f] [-s <size>] [-c <count>] <dest IP> -I <src IP>`
 - `traceroute <dest IP> -s <src IP>`
 - Look at the second and third hop (and their reverse DNS lookups)!
 - What do you see?

Some Flood Ping Results

```
srl_test@kettwig.ude.nornet # ping -c 1000 -s 1400 -f 10.1.1.129 -I 10.30.42.122
PING 10.1.1.129 (10.1.1.129) from 10.30.42.122 : 1400(1428) bytes of data.
1000 packets transmitted, 1000 received, 0% packet loss, time 14591ms
rtt min/avg/max/mdev = 70.115/108.064/177.958/26.870 ms
```

DFN → UNINETT

```
srl_test@kettwig.ude.nornet # ping -c 1000 -s 1400 -f 10.2.1.129 -I 10.30.42.122
PING 10.2.1.129 (10.2.1.129) from 10.30.42.122 : 1400(1428) bytes of data.
1000 packets transmitted, 1000 received, 0% packet loss, time 14783ms
rtt min/avg/max/mdev = 31.009/76.446/136.024/27.666 ms
```

DFN → Hafslund

```
srl_test@kettwig.ude.nornet # ping -c 1000 -s 1400 -f 10.1.1.129 -I 10.31.42.122
PING 10.1.1.129 (10.1.1.129) from 10.31.42.122 : 1400(1428) bytes of data.
1000 packets transmitted, 999 received, 0% packet loss, time 14412ms
rtt min/avg/max/mdev = 121.153/175.432/252.685/28.585 ms
```

Versatel → UNINETT

```
srl_test@kettwig.ude.nornet # ping -c 1000 -s 1400 -f 10.2.1.129 -I 10.31.42.122
PING 10.2.1.129 (10.2.1.129) from 10.31.42.122 : 1400(1428) bytes of data.
1000 packets transmitted, 999 received, 0% packet loss, time 14182ms
rtt min/avg/max/mdev = 78.643/124.496/207.773/26.729 ms
```

Versatel → Hafslund

RTT differences among provider combinations; higher ADSL delay (Versatel)

Some Traceroute Results

```
srl_test@kettwig.ude.nornet # traceroute 10.1.1.129 -s 10.30.42.122
```

```
traceroute to 10.1.1.129 (10.1.1.129), 30 hops max, 60 byte packets
```

- 1 essen.dfn.ude.nornet (10.30.42.1) 2.104 ms 2.849 ms 2.831 ms
- 2 dfn.ude.uninett.simula.nornet (192.168.178.10) 95.059 ms 95.024 ms 94.961 ms
- 3 srl-test.frogner.uninett.simula.nornet (10.1.1.129) 105.432 ms 105.281 ms 105.220 ms

DFN → UNINETT

```
srl_test@kettwig.ude.nornet # traceroute 10.2.1.129 -s 10.30.42.122
```

```
traceroute to 10.2.1.129 (10.2.1.129), 30 hops max, 60 byte packets
```

- 1 essen.dfn.ude.nornet (10.30.42.1) 1.190 ms 1.739 ms 1.031 ms
- 2 dfn.ude.uninett.simula.nornet (192.168.178.10) 56.972 ms 56.722 ms 56.853 ms
- 3 srl-test.frogner.hafslund.simula.nornet (10.2.1.129) 100.773 ms 99.513 ms 99.337 ms

DFN → Hafslund

```
srl_test@kettwig.ude.nornet # traceroute 10.1.1.129 -s 10.31.42.122
```

```
traceroute to 10.1.1.129 (10.1.1.129), 30 hops max, 60 byte packets
```

- 1 essen.versatel.ude.nornet (10.31.42.1) 1.830 ms 2.633 ms 2.609 ms
- 2 versatel.ude.uninett.simula.nornet (192.168.133.222) 127.768 ms 127.954 ms 127.507 ms
- 3 srl-test.frogner.uninett.simula.nornet (10.1.1.129) 182.544 ms 182.564 ms 182.269 ms

Versatel → UNINETT

```
srl_test@kettwig.ude.nornet # traceroute 10.2.1.129 -s 10.31.42.122
```

```
traceroute to 10.2.1.129 (10.2.1.129), 30 hops max, 60 byte packets
```

- 1 essen.versatel.ude.nornet (10.31.42.1) 1.178 ms 1.805 ms 1.769 ms
- 2 versatel.ude.uninett.simula.nornet (192.168.133.222) 88.834 ms 91.932 ms 96.620 ms
- 3 srl-test.frogner.hafslund.simula.nornet (10.2.1.129) 79.603 ms 75.599 ms 69.910 ms

Versatel → Hafslund

Hop 2: Router's ICMP TTL Exceeded is sent back via Simula's primary ISP!

What Else To Do?

- Try the same with IPv6!
 - `ping6 [-f] [-s <size>] [-c <count>] <dest IP> -I <src IP>`
 - `traceroute6 <dest IP> -s <src IP>`
- Try NetPerfMeter!
 - Supports TCP including **MPTCP**, SCTP, UDP, DCCP
 - Server side: `netperfmeter <port>`
 - Client side: `netperfmeter <server>:<port> <flow details> ...`
(see manpage for details!)
- Install custom software
 - But note: do not assume the slivers to be permanent storages
 - Write scripts to automatise installation
 - In case of problems, nodes may just be wiped and reinstalled

And, of course, try your own experiments in NorNet!

Overview: Conclusion

- Preparations
- Getting an Overview of the Testbed
- Using a Slice
- A Practical Example
- Conclusion

Conclusion and Future Work

- **NorNet Core is ready for your ideas!**
 - Think about your experiments
 - Let them run in NorNet Core
- How to get permanent access?
 - **Talk to us!**
 - Provide some information on your project
Let us **discuss the details** about running your experiment in NorNet Core!

In case of questions, ask us!

“NorNet wants to be a building block of the railroad to heaven” ...



... and not be another unused testbed that paves the road to hell!

Any Questions?

NRNET

Visit <https://www.nntb.no> for further information!